

LAW OFFICES
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC

2100 PENNSYLVANIA AVENUE, N.W.
WASHINGTON, DC 20037-3213
TELEPHONE (202) 293-7060
FACSIMILE (202) 293-7860
www.sughrue.com

August 23, 2000

J. Frank Osha, Esq.
Direct Dial No.: (202) 663-7915
E-Mail: fosha@sughrue.com

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Re: Application of Teruyuki MOTOHASHI
PORTABLE RADIO TERMINAL WITH INFRARED COMMUNICATION
FUNCTION AND COMMUNICATION METHOD FOR PORTABLE RADIO
TERMINAL
Our Ref. Q60573

Dear Sir:

Attached hereto is the application identified above including 19 sheets of the specification and claims, 6 sheets of informal drawings, and a copy of the executed Declaration and Power of Attorney. The Assignment will be filed at a later date.

The Government filing fee is calculated as follows:

Total claims	9 - 20	=		x	\$18.00	=	
Independent claims	3 - 3	=		x	\$78.00	=	
Base Fee							\$690.00
TOTAL FEE							\$690.00

A check for the statutory filing fee of \$690.00 is attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16 and 1.17 and any petitions for extension of time under 37 C.F.R. § 1.136 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from August 23, 1999 based on Japanese Application No. 235009/99. The priority document will be filed at a later date.

Respectfully submitted,
SUGHRUE, MION, ZINN,
MACPEAK & SEAS, PLLC
Attorneys for Applicant

By: J. Frank Osha
J. Frank Osha
Registration No. 24,625

PORTABLE RADIO TERMINAL WITH INFRARED COMMUNICATION FUNCTION AND
COMMUNICATION METHOD FOR PORTABLE RADIO TERMINAL

BACKGROUND OF THE INVENTION

5

Field of the Invention

The present invention relates to a portable radio terminal
with an infrared communication function and a communication
method for the portable radio terminal with the infrared
10 communication function and more particularly to the portable
radio terminal with the infrared communication function and the
communication method for the portable radio terminal with the
infrared communication function for power control when infrared
communication and radio communication are executed
15 simultaneously.

Description of the Related Art

A radio communication function transmits radio waves in
20 order to carry out radio communications. Transmission power to
transmit radio waves generally requires a large consumption of
electric current (for example, an RCR STD-27 digital radiophone
system, such as a PDC (Personal Digital Cellular) system, is used
as a radio communication system).

25 An infrared communication function also requires a large
consumption of electric current in order to make an emitting
element emit.

Therefore, in a case that an infrared communication function
is provided in a radio portable information terminal using a

battery as a power source, when the battery voltage drops, it becomes impossible to use the radio communication function and the infrared communication function simultaneously.

A terminal is known, in which irrespective of the battery voltage, it is restricted to use the radio communication function and the infrared communication function simultaneously from the beginning in order to give a longer lifetime of the battery for the radio portable information terminal, and a battery capacity and a power source circuit are minimized.

10 In these known techniques, there are the following problems.

A first problem is that the radio communication function and the infrared communication function can not be used simultaneously. As its causes, the infrared communication function requires a large consumption electric current and a communicable distance of the infrared communication function is required to be kept at a constant distance or more.

15 A second problem is that a large battery capacity is required to use the radio communication function and the infrared communication function simultaneously and a battery becomes large in size. As its cause, both of the radio communication function and the infrared communication function require large consumption of electric current.

20 Therefore, it is desirable to control an increase of consumption electric of current when the radio communication function and the infrared communication function are executed simultaneously.

25

SUMMARY OF THE INVENTION

In view of the above, it is an object of the present invention to provide a portable radio terminal with an infrared communication function and a communication method therefore, capable of controlling an increase of electric current consumption when a radio communication function and the infrared communication function are executed simultaneously.

According to a first aspect of the present invention, there is provided a communication method for a portable radio terminal with an infrared communication function, the communication method including: a step of judging whether a radio communication function section is in radio communication or not; and a step of controlling a driving current of a light emitting element in an infrared communication function section in accordance with a judgment.

Also, a preferable mode is one wherein the driving current of the light emitting element in the infrared communication function section is controlled in accordance with a transmission power value of the radio communication function section.

According to a second aspect of the present invention, there is provided a communication method for a portable radio terminal with an infrared communication function, the communication method including: a step of judging whether a radio communication function section is in radio communication or not; and a step of selecting the infrared communication function among a plurality of infrared communication functions in accordance with a judgement.

In the foregoing second aspect, a preferable mode is one

wherein the infrared communication function is selected among the plurality of infrared communication functions in accordance a transmission power value of the radio communication function section.

- 5 Also, a preferable mode is one wherein it is notified that a communicable distance of the infrared communication function is restricted.

According to a third aspect of the present invention, there is provided a portable radio terminal with an infrared
10 communication function including: a radio communication function section; an infrared communication function section; and an information processing section for detecting a function state of the radio communication function section and for controlling an infrared output from the infrared communication function section.

- 15 Also, a preferable mode is one wherein the function state is a radio output of the radio communication function section, and the infrared output is controlled to be small when the radio output is larger.

Also, a preferable mode is one wherein the small infrared
20 output corresponds to restricting a communicable distance of the infrared communication function.

As described above, the portable radio terminal with the infrared communication function and the communication method for the portable radio terminal of the invention provide four effects.

- 25 First, it is possible to use the infrared communication function though the radio communication function is in radio communication; because it is judged while in infrared communication whether it is in radio communication or not. When it is in radio communication, the driving current of the light

emitting element is controlled and the driving current value is restricted.

Second, it is possible to extend battery lifetime because it is possible to select a driving current of the light emitting element in accordance with a transmission power value of the radio communication function section.

Third, it is possible make necessary battery capacity and power circuits small because, when the infrared communication function and the radio communication function are operated at the same time, the driving current of the light emitting element in the infrared communication function section and the driving current value is restricted.

Fourth, a person having this terminal can know whether a communicable distance of the infrared communication is restricted or not because the restriction is notified to the person having the terminal while the driving current of the light emitting value is restricted.

BRIEF DESCRIPTION OF THE DRAWINGS

20

The above and other objects, advantages, and features of the present invention will be more apparent from the following description taken in conjunction with the accompanying drawings in which:

25

Fig. 1 is a block diagram showing a portable radio terminal with an infrared communication function according to a first embodiment of the present invention;

Fig. 2 is a circuit block diagram showing details of a part of Fig. 1;

Fig. 3 is an operational flowchart showing a communication method of the portable radio terminal with the infrared communication function according to a first embodiment of the present invention;

5 Fig. 4 is a circuit diagram showing further details of the portable radio terminal with the infrared communication function according to a first embodiment of the present invention;

Fig. 5 is a block diagram showing a portable radio terminal with an infrared communication function according to a second
10 embodiment of the present invention; and

Fig. 6 is an operational flowchart showing a communication method of the portable radio terminal with the infrared communication function according to a second embodiment of the present invention.

15

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Best modes for carrying out the present invention will be described in further detail using various embodiments with
20 reference to the accompanying drawings.

First Embodiment

Figure 1 is a block diagram showing a portable radio terminal
25 with an infrared communication function according a first embodiment. As shown in Fig. 1, the portable radio terminal is provided with an information processing section 101, an infrared communication function section 102, a driving current control section 103, a radio communication function section 104, a battery

105, a power source section 106, an input device 107 and an output device 108.

The information processing section 101 operates by program control and is connected to the infrared communication function section 102 bidirectionally.

The infrared communication function section 102 is capable of infrared-communicating with another apparatus (not shown) with the infrared communication function.

The information processing section 101 is connected to the driving current control section 103.

The radio communication function section 104 capable of radio-communicating is connected to the infrared communication function section 102 bidirectionally.

The power source section 106 stabilizes a voltage of the battery 105 and distributes stabilized voltage to each section.

The input device 107 such as a keyboard is connected to the information processing section 101.

The information processing section 101 is connected to the output device 108 such as an LCD (Liquid Crystal Display).

The infrared communication function section 102, as shown in Fig. 2, is a light emitting element 201 such as an infrared LED (Light Emitting Diode) for emitting infrared signals, a light receiving element 202 such as a phototransistor for receiving infrared signals and a first signal conversion section 203 for coordinating a signal level between the light emitting element 201 and the information processing section 101 and a signal level between the light receiving element 202 and the information processing section 101.

The driving current control section 103, as shown in Fig.

2, is provided with a current control section 204 changing a driving current of the light emitting element 201 in the infrared communication function section 102. The current control section 204 can set a driving current value to a first current value, a
 5 second current value and a third current value.

The radio communication function section 104 is provided with a transmission power amplification section 205 and a transmission power control section 206. The transmission power control section 206 controls and optimizes a transmission power
 10 in accordance with a distance from a base station and an usage situation.

The information processing section 101 is provided with a first control section (not shown) for outputting a control signal 211 controlling a driving current of the light emitting element
 15 201 to the driving current control section 103 when the radio communication function section 104 is in radio communication, and a second control section (not shown) for outputting a switching signal 212 switching control levels of the driving current of the light emitting element 201.

20 Figure 4 shows a concrete circuit diagram of the block diagrams shown in Figs. 1 and 2.

The light emitting element 201 is an infrared LED (Light Emitting Diode) 412, and the light receiving element 202 is a photodiode 413.

25 The first signal conversion section 203 is provided with a driver 414 for driving the infrared LED 412 and an amplifier 415 for amplifying electric signals from the photodiode 413.

Analog electric signals amplified by the amplifier 415 are converted into digital signals by a comparator 416.

A driver 417 coincides the digital signals with signals of the information processing section 101 as to a signal level.

The current control section 204 in the driving current control section 103 is provided with a current restriction resistor A 405, a current restriction resistor B 406 and a current restriction resistor C 407 for restricting the driving current of the infrared LED 412, a first FET (Field Effect Transistor) 401 to short-circuit the current restriction resistor A 405, a second FET 402 for driving the first FET 401, a third FET 403 to short-circuit the current restriction resistor A 405 and the current restriction resistor B 406, a fourth FET 404 for driving the third FET 403, a pull-up resistor A 408 and a pull-up resistor B 409.

Figure 3 shows an operation according to the first embodiment of the present invention.

When starting the infrared communication function is requested to the information processing section 101 by the input device 107 (Step S301), the information processing section 101 judges whether the radio communication function section 104 is in radio communication or not before executing an infrared communication operation (Step S302). When the radio communication function section 104 is not in radio communication, the information processing section 101 sets a driving current value of the light emitting element 201 in the infrared communication function section 102 to a first current value I-1 for the current control section 204 in the driving current control section 103 (Step S307). The first current value I-1 gives no restriction to the driving current of the light emitting element 201.

When the radio communication function section 104 is in

radio communication, the information processing section 101 also judges a transmission power value of the radio communication function section 104 in accordance with information from the transmission power control section 206. When the transmission

5 power value is lower than a predetermined first threshold (Step S304: No), the information processing section 101 sets a driving current value of the light emitting element 201 in the infrared communication function section 102 to a second current value I-2 for the current control section 204 in the driving current control

10 section 103 (Step S306). The second current value I-2 restricts the driving current of the light emitting element 201. When the transmission power value is higher than the predetermined first threshold (Step S304: YES), the information processing section 101 sets a driving current value of the light emitting element

15 201 in the infrared communication function section 102 to a third current value I-3 for the current control section 204 in the driving current control section 103 (Step S305). The third current value I-3 further restricts the driving current of the light emitting element 201 more than the second current value I-2.

20 With these current restrictions, a consumption power of the light emitting element 201 is deduced and an arrival distance of infrared emitted from the light emitting element 201 is restricted. The output device 108 indicates that a communicable distance of the infrared communication is restricted in this way (Step S308).

25 As above described, after the driving current of the light emitting element 201 is determined based on battery voltage, the infrared communication operation is executed (Step S309), and the infrared communication operation is finished (Step S310).

Next, concrete descriptions will be given of the operation

with the circuit diagrams (Figs. 1, 2 and 4) and the operational flowchart (Fig. 3).

When not in radio communication (Step S302: No), the information processing section 101 outputs a signal of a HI (high) level to a control line 411 and outputs a signal of a LOW level to a control line 410 for the current control section 204 in the driving current control 103. With these outputs, the fourth FET 404 is turned ON and the third FET 403 is also turned ON. Both sides of the current restriction resistor A 405 and the current restriction resistor B 406 are short-circuited, the driving current of the infrared LED 412 is restricted by the resistance value of the current restriction resistor C 407, and the first current value I-1 can be set.

In radio communication (Step S302: Yes), when a transmission power value is lower than a predetermined first threshold (Step S304: No), the information processing section 101 outputs a signal of a HI (high) level to the control line 410 and outputs a signal of a LOW level to the control line 411 for the current control section 204 in the driving current control 103. The second FET 402 is turned ON and the first FET 401 is also turned ON. Therefore, both sides of only the current restriction resistor A 405 are short-circuited, the driving current of the infrared LED 412 is restricted by the total resistance value of the current restriction resistor B 406 and the current restriction resistor C 407, and the second current value I-2 can be set.

In radio communication (Step S302: Yes), when a transmission power value is higher than a first predetermined threshold (Step S304: Yes), the information processing section 101 outputs signals of LOW levels to a control line 410 and to a control line

411 for the current control section 204 in the driving current control section 103. All of FETs are turned OFF, the driving current of the infrared LED 412 is restricted by the total resistance value of the current restriction resistor A 405, the
5 current restriction resistor B 406 and the current restriction resistor C 407, and the second current value I-3 can be set.

In the first embodiment, the explanations are given in a case that one threshold is used for judgment of the transmission power value of the radio communication section and two restricted
10 driving current values of the light emitting element are used. However, two and more thresholds may be used to judge detected results of transmission power values and three and more driving current values of light emitting elements may be used in accordance with the number of thresholds.

15 In the first embodiment, a case is described in that the radio communication function section has a function to control a transmission power, however, though there is no function controlling the transmission power, the driving current of the light emitting element is restricted only whether in radio
20 communication or not, and thereby similar effects can be obtained.

Second Embodiment

A second embodiment according to the present invention will
25 be described. Figure 5 shows a portable radio terminal with an infrared communication function according to the second embodiment of the present invention.

The portable radio terminal with the infrared communication function according to the second embodiment is different from that

of the first embodiment in being provided with a second infrared communication function section 501 and a third infrared communication function section 502 instead of a driving current control section 103.

- 5 A driving current of a light emitting element (not shown) in the second infrared communication function section 501 is set to a value lower than a driving current of a light emitting element in the first infrared communication function section 102.

- 10 Further, a driving current of a light emitting element (not shown) in the third infrared communication function section 502 is set to a value lower than the driving current of the light emitting element in the second infrared communication function section 501.

Figure 6 shows an operation of the second embodiment.

- 15 When starting the infrared communication function is requested to an information processing section 101 by an input device 107 (Step S601), the information processing section 101 judges whether a radio communication function section 104 is in radio communication or not before executing an infrared
20 communication operation (Step S602).

- When the radio communication function section 104 is not in radio communication (Step S602: No), the information processing section 101 executes the infrared communication function by the first infrared communication function section 102 (Step S606).
25 No restriction is given to the driving current of the light emitting element in the first infrared communication function section 102.

 When the radio communication function section 104 is in radio communication (Step S602: Yes), the information processing

section 101 judges the transmission power value of the radio communication function section 104 based on information from a transmission power control section 206.

5 When the transmission power value is lower than a predetermined first threshold (Step S603: No), the information processing section 101 executes infrared communications using the second infrared communication function section 501 (Step S605) and, at a same time, an output device 108 notifies to a person having the portable radio terminal that a communicable distance
10 of the infrared communications is restricted (Step S607). A restriction is given to the driving current of the light emitting element in the second infrared communication function section 501.

15 When the transmission power value is higher than the predetermined first threshold (Step S603: Yes), the information processing section 101 executes infrared communications using the third infrared communication function section 502 (Step S604) and, at a same time, the output device 108 notifies to the person having the portable radio terminal that a communicable distance of the
20 infrared communications is restricted (Step S607). A further restriction is given to the driving current of the light emitting element in the third infrared communication function section 502 rather than the second infrared communication function section 501.

25 In this way, the infrared communication function is selected, the selected infrared communication operation is executed and the infrared communication operation is finished (Step S608).

It is thus apparent that the present invention is not limited to the above embodiments but may be changed and modified

without departing from the scope and spirit of the invention.

Finally, the present application claims the priority based on Japanese Patent Application No. Hei11-235009 filed on August 23, 1999, which is herein incorporated by reference.

WHAT IS CLAIMED IS:

1 1. A communication method for a portable radio terminal with
 2 an infrared communication function, said communication method
 3 comprising:

4 a step of judging whether a radio communication function
 5 section is in radio communication or not; and

6 a step of controlling a driving current of a light emitting
 7 element in an infrared communication function section in accordance
 8 with a judgement.

1 2. The communication method for a portable radio terminal
 2 with an infrared communication function according to Claim 1,
 3 wherein said driving current of said light emitting element in said
 4 infrared communication function section is controlled in accordance
 5 with a transmission power value of said radio communication function
 6 section.

1 3. The communication method for a portable radio terminal with
 2 an infrared communication function according to Claim 1, wherein
 3 it is notified that a communicable distance of said infrared
 4 communication function is restricted.

1 4. A communication method for a portable radio terminal with
 2 an infrared communication function, said communication method
 3 comprising:

4 a step of judging whether a radio communication function
 5 section is in radio communication or not; and

6 a step of selecting an infrared communication function among
 7 a plurality of infrared communication functions in accordance with

8 a judgement.

1 5. The communication method for a portable radio terminal
2 with an infrared communication function according to Claim 4,
3 wherein said infrared communication function is selected among said
4 plurality of infrared communication functions in accordance a
5 transmission power value of said radio communication function
6 section.

1 6. The communication method for a portable radio terminal with
2 an infrared communication function according to Claim 4, wherein
3 it is notified that a communicable distance of said infrared
4 communication function is restricted.

1 7. A portable radio terminal with an infrared communication
2 function comprising:
3 a radio communication function section;
4 an infrared communication function section; and
5 an information processing section for detecting a function
6 state of said radio communication function section and for
7 controlling an infrared output from said infrared communication
8 function section.

1 8. The portable radio terminal with an infrared communication
2 function according to Claim 7, wherein said function state is a
3 radio output of said radio communication function section, and said
4 infrared output is controlled to be small when said radio output
5 is larger.

1 9. The portable radio terminal with an infrared communication
2 function according to Claim 8, wherein said small infrared output
3 corresponds to restricting a communicable distance of said infrared
4 communication function.

ABSTRACT OF THE DISCLOSURE

A portable radio terminal with an infrared communication function prevents consumption power from increasing when a radio communication function and an infrared communication function are used at a same time. A radio communication function section is judged whether in radio communication or not, and a driving current of an light emitting element in an infrared communication function section. The driving current of the light emitting element for an infrared communication is controlled in accordance with an operation of the radio communication function section, therefore, it is possible to loosen a condition for enabling infrared communication. As to restrictions for outputs from light emitting elements, a driving current of a light emitting element is controlled or plural light emitting elements having respective outputs are selectively driven.

FIG.1

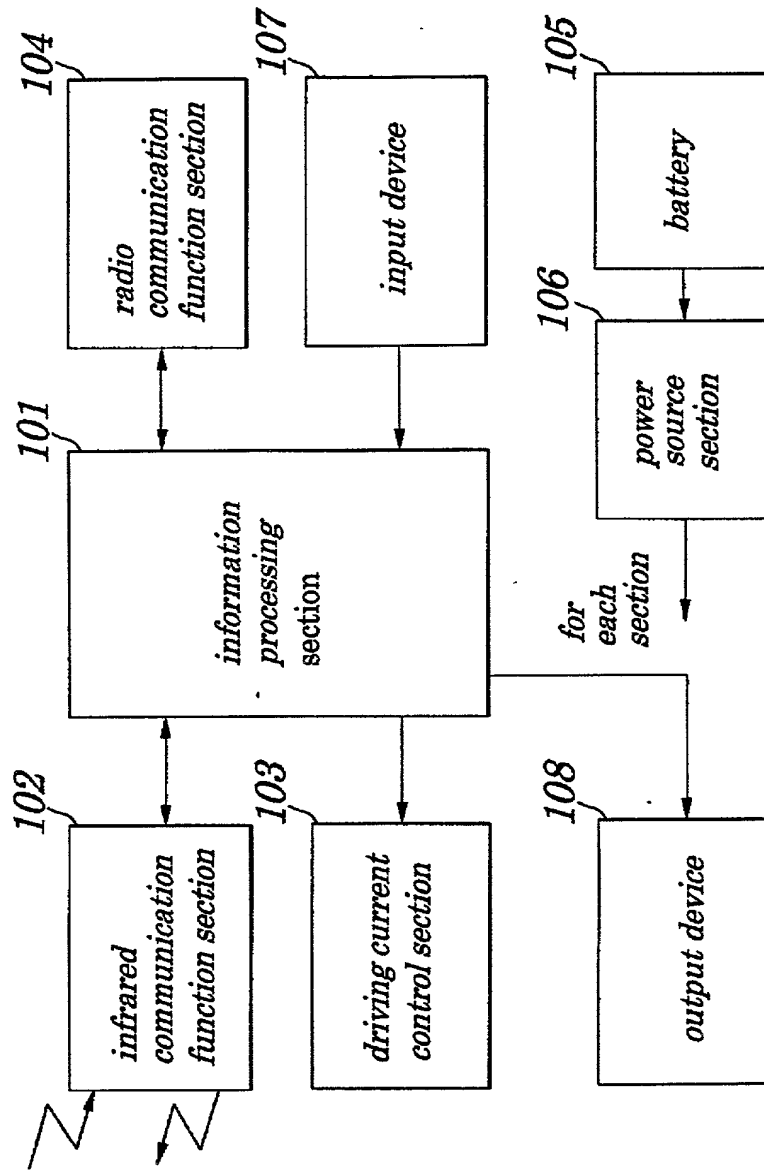


FIG. 2 is a block diagram of a system 100. The system 100 includes a light receiving element 202, a light emitting element 201, a signal conversion section 203, a current control section 204, a power source section 106, an information processing section 101, a transmission power control section 206, and a transmission power amplification section 205. The light receiving element 202 is connected to the signal conversion section 203. The signal conversion section 203 is connected to the light emitting element 201. The light emitting element 201 is connected to the current control section 204. The current control section 204 is connected to the power source section 106. The current control section 204 is also connected to the information processing section 101. The information processing section 101 is connected to the transmission power control section 206. The transmission power control section 206 is connected to the transmission power amplification section 205. The transmission power amplification section 205 is connected to an antenna 207. The system 100 is also connected to a switching signal 212 and a control signal 211.

FIG.2

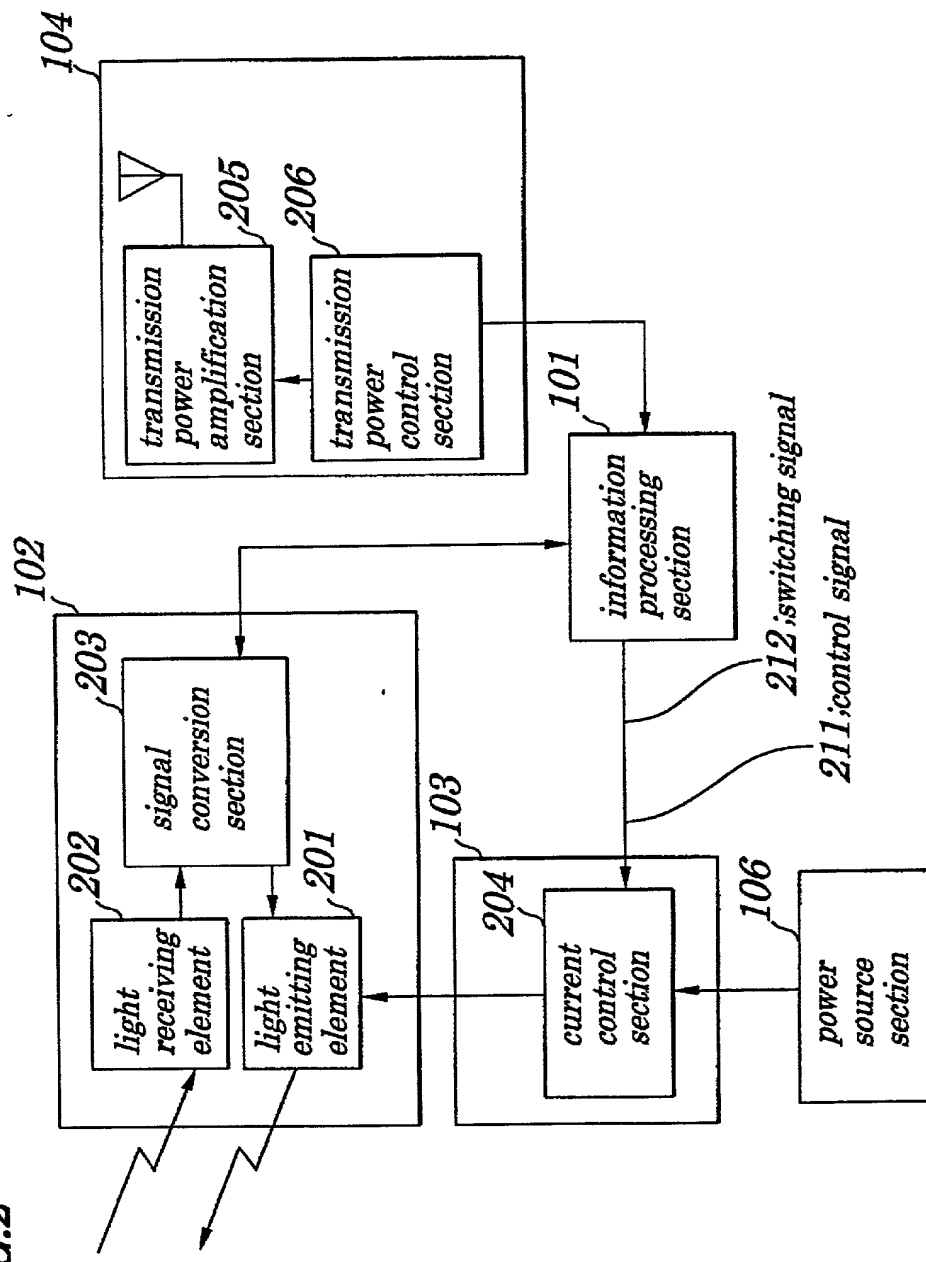


FIG.3

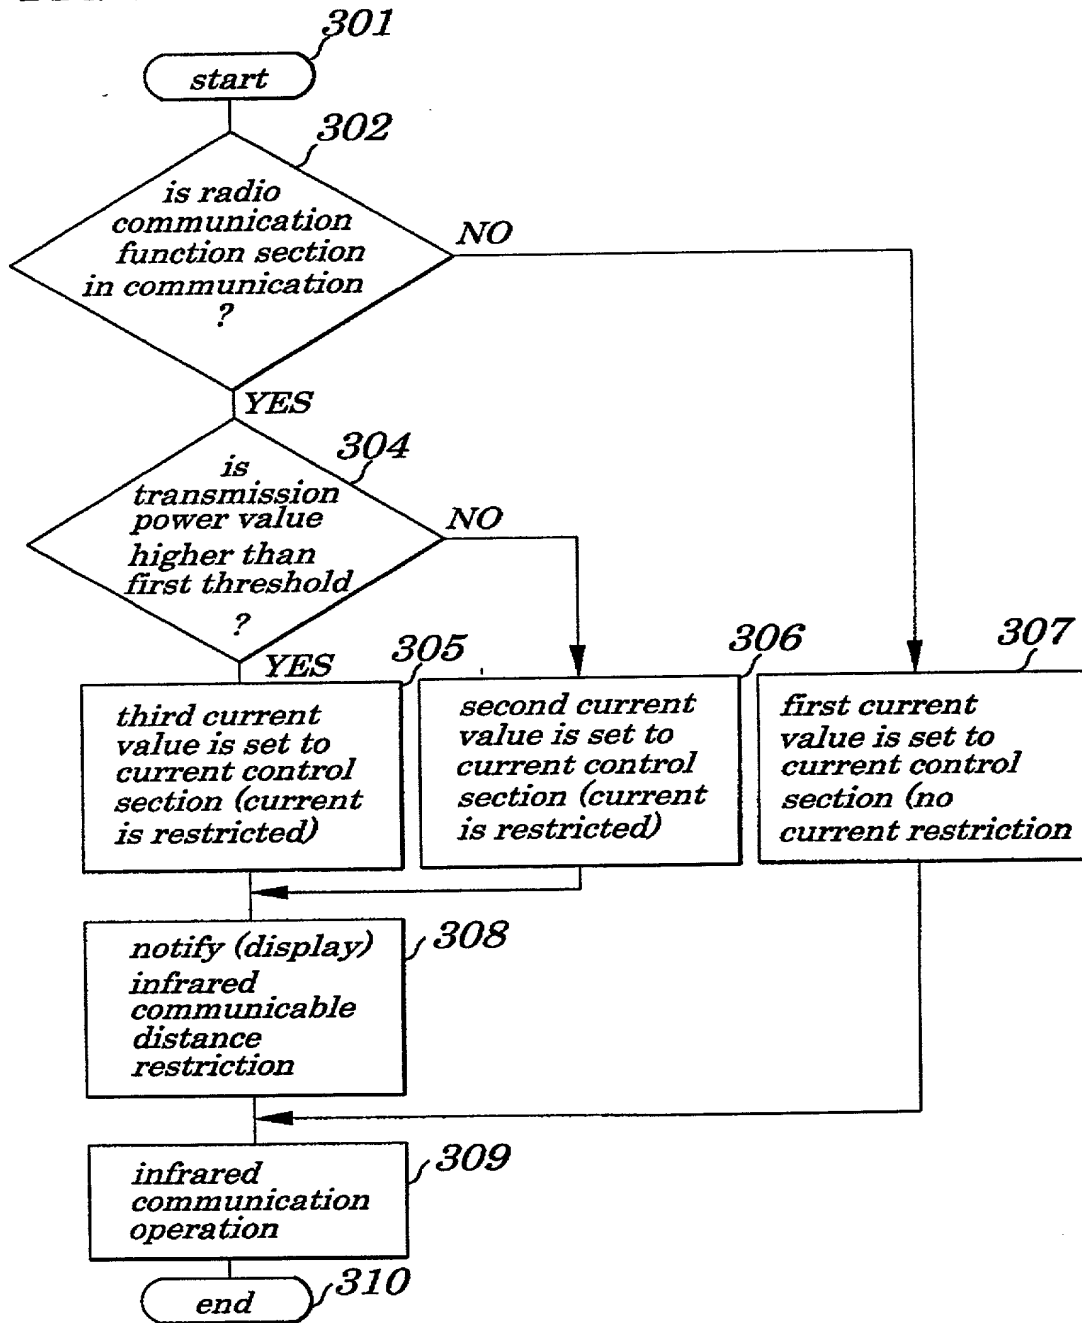


FIG. 4

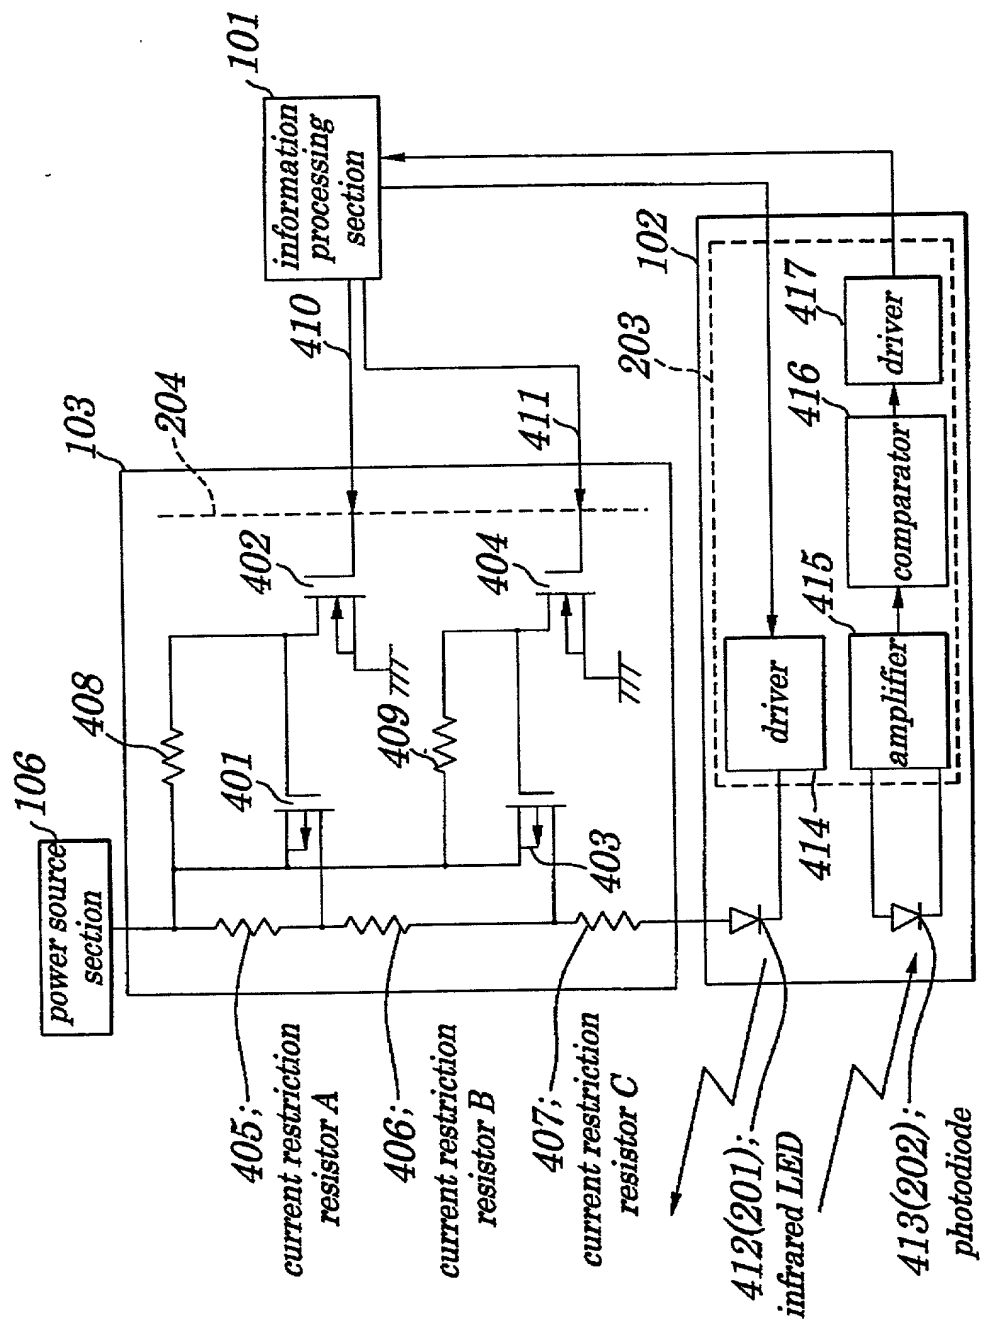


FIG. 5


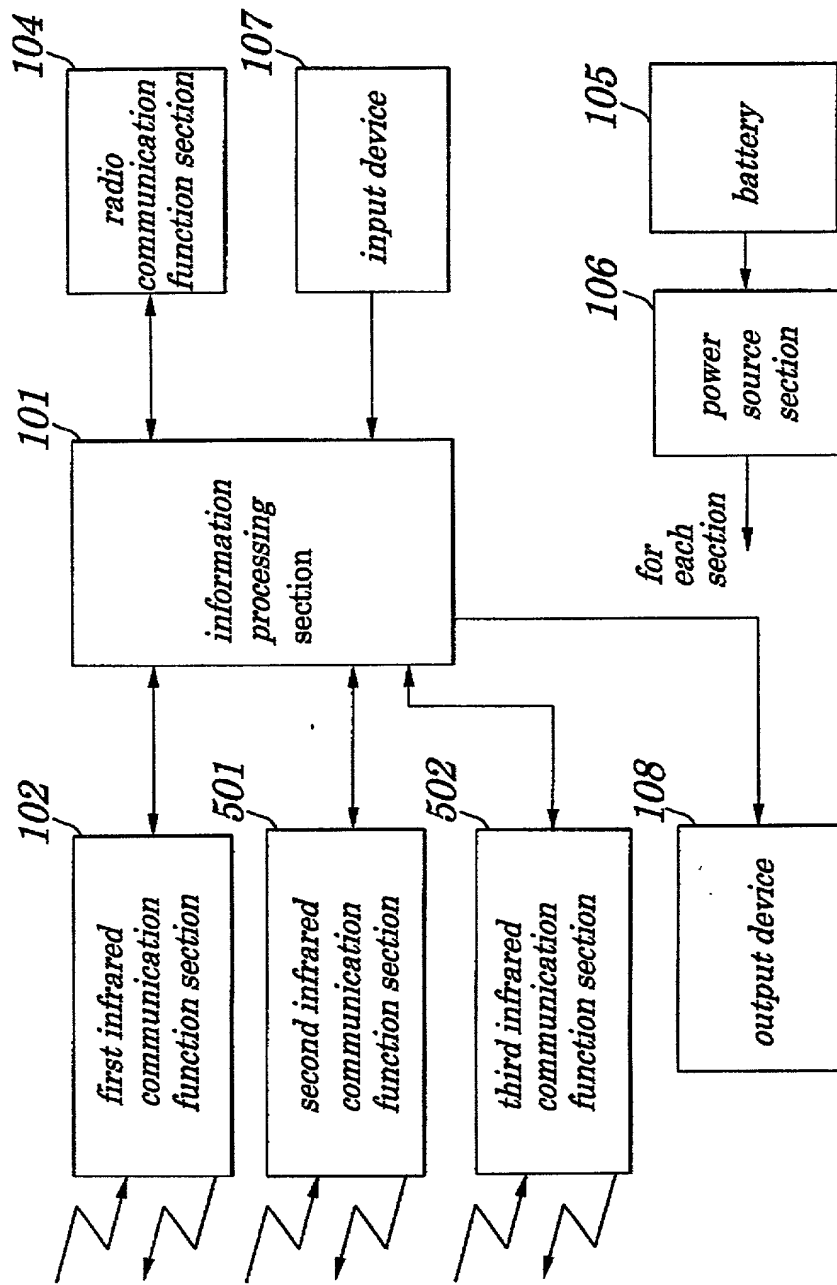


FIG.6

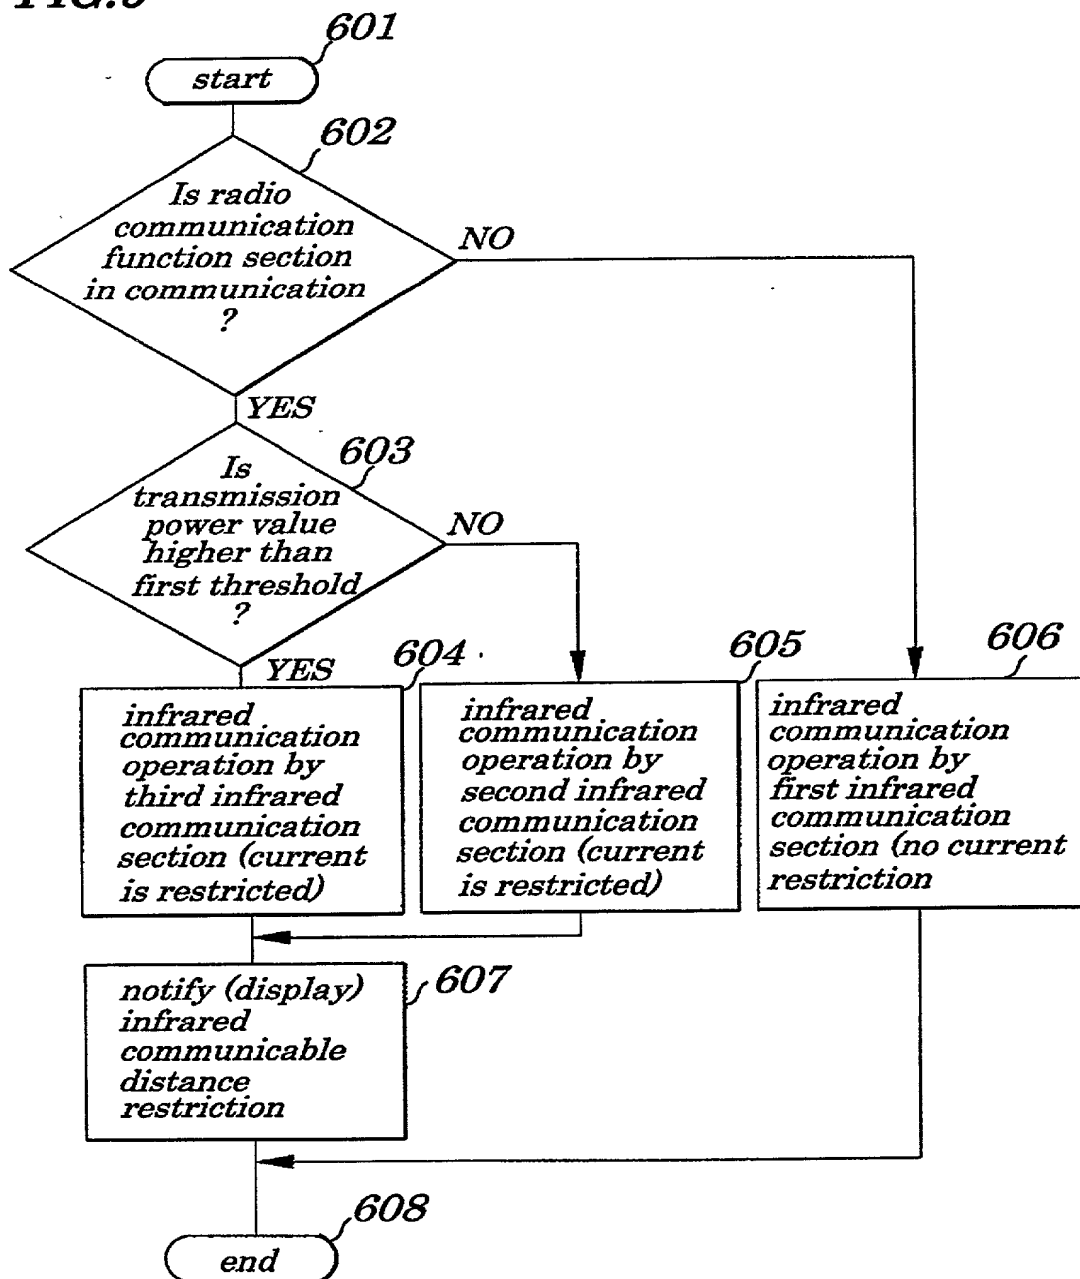

192

SOLE JOINT

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name: that I verily believe I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought in the application entitled:

**PORTABLE RADIO TERMINAL WITH INFRARED COMMUNICATION FUNCTION
AND COMMUNICATION METHOD FOR PORTABLE RADIO TERMINAL**

which application is:

the attached application
(for original application)

application Serial No. _____
filed _____, and amended on _____
(for declaration not accompanying application)

that I have reviewed and understand the contents of the specification of the above-identified application, including the claims, as amended by any amendment referred to above; that I acknowledge my duty to disclose information of which I am aware which is material to the patentability of this application under 37 C.F.R. 1.56, that I hereby claim foreign priority benefits under Title 35, United States Code §119, §172 or §365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified on said list any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application on which priority is claimed:


Application Number	Country	Filing Date	Priority Claimed (yes or no)
235009/1999	Japan	August 23, 1999	yes

I hereby claim the benefit of Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in a listed prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge my duty to disclose any information material to the patentability of this application under 37 C.F.R. 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status (patented, pending, abandoned)

I hereby appoint John H. Mion, Reg. No. 18,879; Donald E. Zinn, Reg. No. 19,046; Thomas J. Macpeak, Reg. No. 19,292; Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olexy, Reg. No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Robert G. McMorrow, Reg. No. 19,093; Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No. 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710; Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit, Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William H. Mandir, Reg. No. 32,156; Scott M. Daniels, Reg. No. 32,562; Brian W. Hannon, Reg. No. 32,778 and Abraham J. Rosner, Reg. No. 33,276, my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and request that all correspondence about the application be addressed to SUGHRUE, MION, ZINN, MACPEAK & SEAS, 2100 Pennsylvania Avenue, N.W., Washington, D.C. 20037-3202.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Date <u>August 16, 2000</u>	First Inventor <u>TERUYUKI MOTOHASHI</u>
Residence <u>Tokyo, Japan</u>	Signature <u>Teruyuki Motohashi</u> 
Citizenship <u>Japanese</u>	Post Office Address <u>c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan</u>